


Polaris Power Outlet Placement

The best location to place a power outlet behind a Nimbus frame are within the open areas (shown shaded in orange) on the back of the frame. Here are the locations of those areas based on the hanger. Nimbus is shipped with a very low profile plug and can be placed almost anywhere but is best when placed in a recessed outlet or in the following locations relative to the frame mounting position.

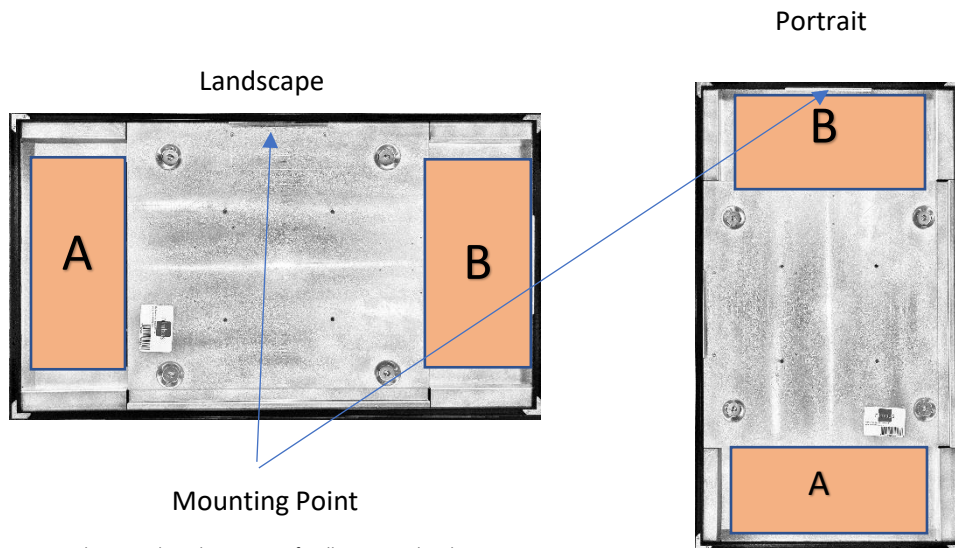

Anchor point based on center of wall mounting bracket
(Measurements assume you are using Nimbus Supplied wall mount)

The included wall mount is a six inch "French cleat" type mount. The Nimbus frame can be hung on it in either a portrait or landscape mode in accordance with installation instructions. The mounting screws are 2" below the frame top edge. Below are measurements from the center hole of the wall mount.

Both A and B are 2" inside the top and bottom edges

A – $\frac{3}{4}$ " from outside edge and 7.5" wide. 11" from center of frame

B – 1" from outside edge and 7" wide. 11" from center of frame

Polaris Power cord



Low profile power connector will fit in most normal outlets. Very tight recessed outlets may have problem with off center cord.